



TISCOBUILD



Sm@rtFAB



Contact us
Phone: 1800 108 8282

COMPANY ADDRESS

Tata Steel Limited
43, Jawaharlal Nehru Road, Kolkata - 700 071
Email : all.tsl_support@conneqtcorp.com

 www.tatasteel.com

 [@TiscoBuild](https://www.facebook.com/TiscoBuild)

 [@TataTiscoBuild](https://www.youtube.com/TataTiscoBuild)

TATA STEEL
 WeAlsoMakeTomorrow



TISCOBUILD

Constructing a Sustainable Tomorrow



TiscoBuild Green Construction Blocks

“TiscoBuild Green Construction Blocks are a sustainable replacement of Red clay bricks. They are made using superior autoclaving technology giving these blocks superior quality over traditional bricks.”



Our blocks are
Greenest & Coolest



Guaranteed Strength

TiscoBuild Blocks have an excellent consistency and have a minimum compressive strength of 4.5 MPa.



Precise Dimensions & Finish

The automatic manufacturing of TiscoBuild blocks gives dimensional accuracy eliminating the need for the usual thick plaster coating done in red clay or fly ash brick walls, leading to a better wall finish.

Best-in-class Thermal Insulation

TiscoBuild Blocks have an excellent thermal rating. They provides well insulated interiors, keeping out warm air in summer and cold air in winters; leading to significant reduction in the air conditioning cost of the house.



Termite & Pest Resistance

The inorganic composition of TiscoBuild blocks makes them completely termite proof and pest resistant.



No Water Curing

Walls made with TiscoBuild blocks need no water curing, leading to savings in time and water.



2X Fire Resistance

TiscoBuild blocks have a fire rating of 4 hours which is twice the fire rating of red clay bricks.

Commonly Used dimensions

SKU	Dimensions (Length X Height)	Thickness	Preferred Usage	Blocks/m ³	Fly Ash Bricks Replaced	Red Clay Bricks Replaced
	600mm x 200mm	100mm	Internal Walls	84	6.5	5.5
	600mm x 200mm	125mm	Internal Walls	67	8.5	7
	600mm x 200mm	150mm	Internal Walls	56	10	8.5
	600mm x 200mm	200mm	External Walls	42	13.5	11.5
	600mm x 200mm	230mm	External Walls	37	15	13
	600mm x 200mm	250mm	External Walls	34	17	14


Only Product to be Certified by CBRI & TERI




Sl. No.	Test Parameter	Unit	Average Result	Req. As Per is 2185 P-3)-1984, Reaff:2005
1	Compressive Strength	N/mm ²	4.75	4.00 Min (Grade-1)
2	Dry Density	kg/m ³	640	551 - 650
3	Drying Shrinkage	%	0.037	0.05 Max.
4	Thermal Conductivity	W/mk	0.17	0.24 Max.
5	Sound Transmission Class (STC)	dB	40	-
6	Fire Resistance	Hours	4	-




Particulars	Units	Reduction (absolute)	Reduction (Percentage)
Energy consumption reduction	kgoe/m ³ of blocks	73	86
Carbon footprint reduction	kgCO ₂ /m ³ of blocks	677	80
Water usage reduction	liter/m ³ of blocks	2813	76
Topsoil reduction	kg/m ³ of blocks	2000	100
Sand usage reduction	kg/m ³ of blocks	2513	93




Energy consumption reduction




Carbon footprint reduction



Water usage reduction



Topsoil usage reduction



Sand consumption reduction



Usage Guideline

BUILD WELL BUILD STRONG



Proper Stacking

Blocks must be stacked at the site on a level, dry surface.

Slight Surface Wetting

Only slight surface wetting of TiscoBuild blocks required before application.





Bond beam Must

After every 4 feet of wall or at sill & lintel level to be done with two 8mm steel bars.



Adhesive Application

For masonry work of TiscoBuild blocks, ONLY thin bed joining mortar (adhesive) must be used. Cement-Sand Mortar must NOT be used.

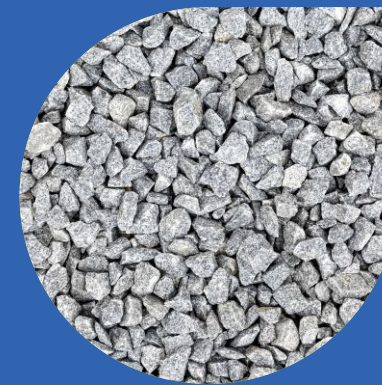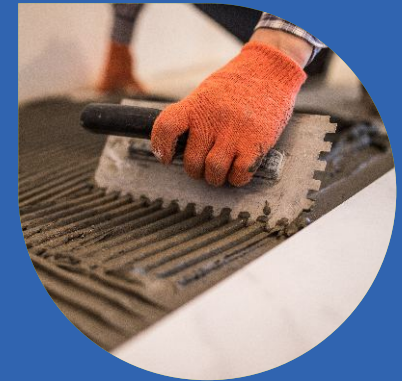


Avoiding Point Load

Aggregates must be used to pack wall at upper beam.

Mesh on Joints

Using wire mesh/fiber mesh for RCC joints or coping.

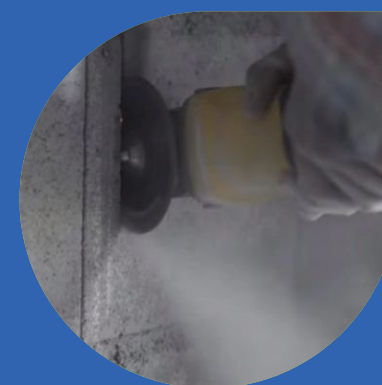

Drilling/Ducting

For electrical conduits and piping installation, we can drill a screw or carve an electrical conduit in TiscoBuild block's wall using an electrical router or a chasing tool. A power drill or router can be used to install an electrical box.